



Models	35-A
Max. Height	40"/101 cm
Min. Height	9"/23 cm
Loading Height	32"/80 cm
Chair Height	N/A
Max. Length	79"/200 cm
Min. Length	63"/160 cm
Chair Depth	N/A
Overall Width	24"/61 cm
Weight	74 lb/34 kg
Max. Load Cap.	500 lb/227 kg
No. Of Positions	8
Roll-in Style	Yes
Lift-in Style	No
Min. No. CMTs required for loading/unloading empty	1
Recommended Fastener Systems	175 Series or Stat Trac™*

NOTE: Except for overall width, dimensions are measured from the outermost edges of the main frame. Product specifications may change without notice. Specifications are rounded to the nearest whole number. Conversions are calculated before rounding. Loading height is measured from the ground to the bottom of the loading wheel. Maximum load capacity is total weight distributed in accordance with basic human anatomy proportions. EMTs must consider the weight of the patient, equipment, and accessories when determining total load on the cot.

*The 35-AST, 35-A+ST, 93ESST, and 93EXST are Stat Trac compatible when manufactured. The 35A, 35-A+, 93ES, and 93EX become Stat Trac compatible when adapted with a Ferno retrofit kit.
** 400 pound load capacity

THE 35-A MOBILE TRANSPORTER™


The lightest cot available with a 500-pound load capacity, the 35-A Mobile Transporter features the Ferno-original X-frame design.

Standard features:

- ✦ Built-in shock frame and fully adjustable gas-assist backrest to enhance patient care
- ✦ Improved lubrication-free, easy-roll wheels
- ✦ Head-end, fold-down frame and foot-end lead handle for EMT control/maneuverability
- ✦ Also comes in specialized versions: 35-A+; Stat Trac versions 35-AST and 35-A+ST; 35-ANM (Non-Magnetic)*; and the 35-IT (Incubator Transporter)*

THE K.E.D. (KENDRICK EXTRICATION DEVICE) - MODEL 125

The Ferno 'K.E.D.' is a versatile, improved means of immobilizing and extricating patients from auto accidents or confined spaces. The wrap-around design provides horizontal flexibility for easy application and vertical rigidity for maximum support of the spine, neck, and head during extrication.

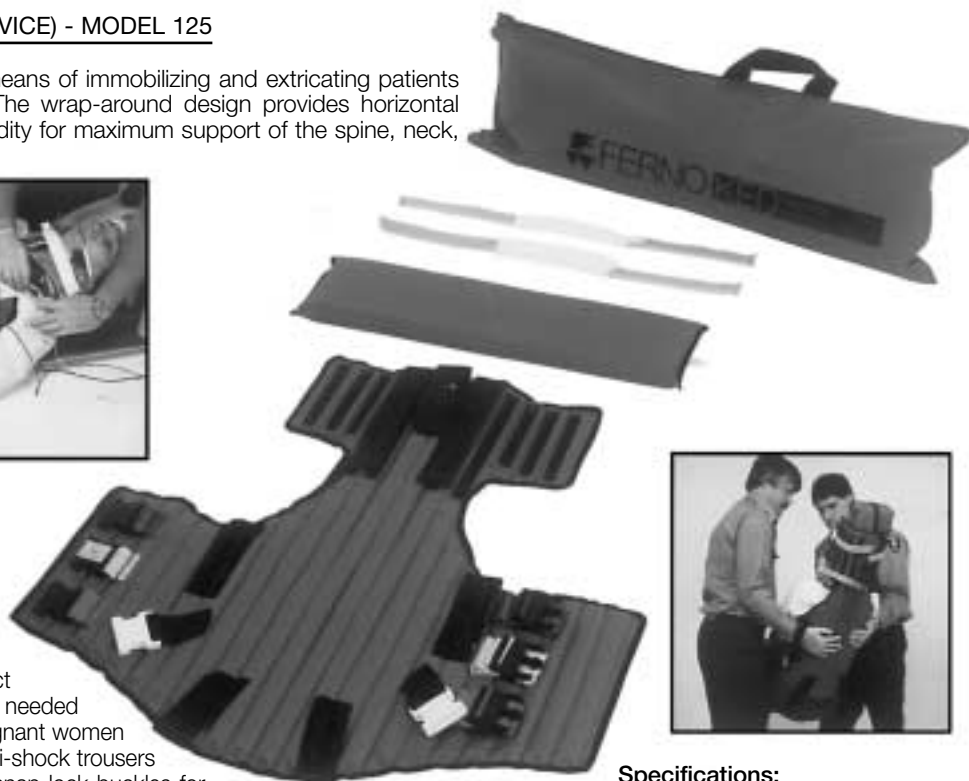

Standard features include:

- ✦ Wrap-around design for greater body contact
- ✦ Neatly stored straps instantly available when needed
- ✦ Design flexibility for use on children and pregnant women
- ✦ Does not interfere with the application of anti-shock trousers
- ✦ Color-coded, sewn-in securing straps and snap-lock buckles for easy application
- ✦ Built-in handles which enable rescuers to get a firm grip on the patient and K.E.D. as one unit
- ✦ Adaptability for hip and pelvic splinting by simply inverting the K.E.D. and securing it to the body
- ✦ Adjustable, fold-back sides which permit easy access to patient's chest for defibrillation, auscultation or the application of monitor electrodes

Specifications:

✦ Length,	flat	33"	(84 cm)
	in case	34"	(86 cm)
✦ Width,	flat	32"	(81 cm)
	in case	10"	(25 cm)
✦ Thickness,	flat	1"	(2 cm)
	in case	5"	(13 cm)
✦ Weight		7 lbs.	(3 kg)
✦ Load Limit		500 lbs.	(227 kg)